



EXHIBIT "A"

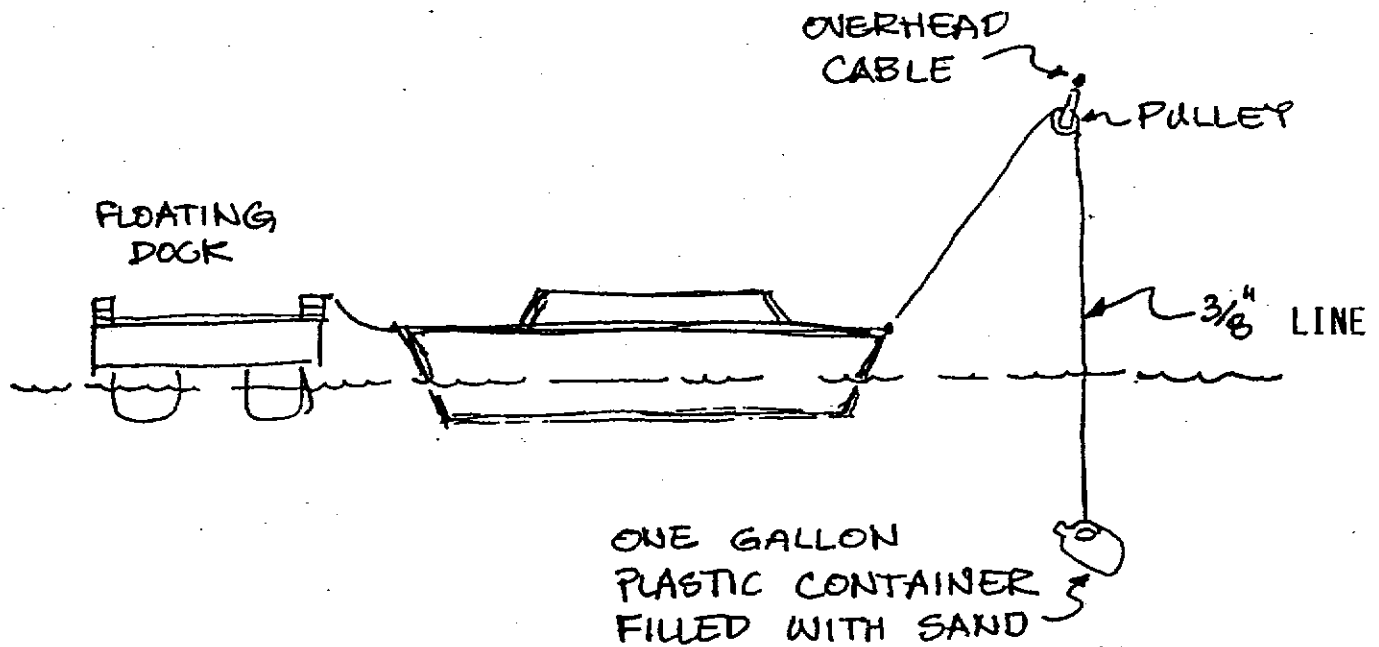

- * LINE MUST BE LONG ENOUGH TO PERMIT WEIGHT TO BE SUSPENDED BELOW THE WATER LINE AT ALL TIMES
- * PULLEYS ARE DESIGNED TO RECEIVE A 3/8" LINE
- * PULLEYS ARE POSITIONED ON THE CABLE TO PERMIT 2 PULLEYS FOR EACH DOCK SPACE
- * RECOMMENDED LINE:
3/8" TWISTED NYLON MOORING OR DOCK LINE

EXHIBIT "A"

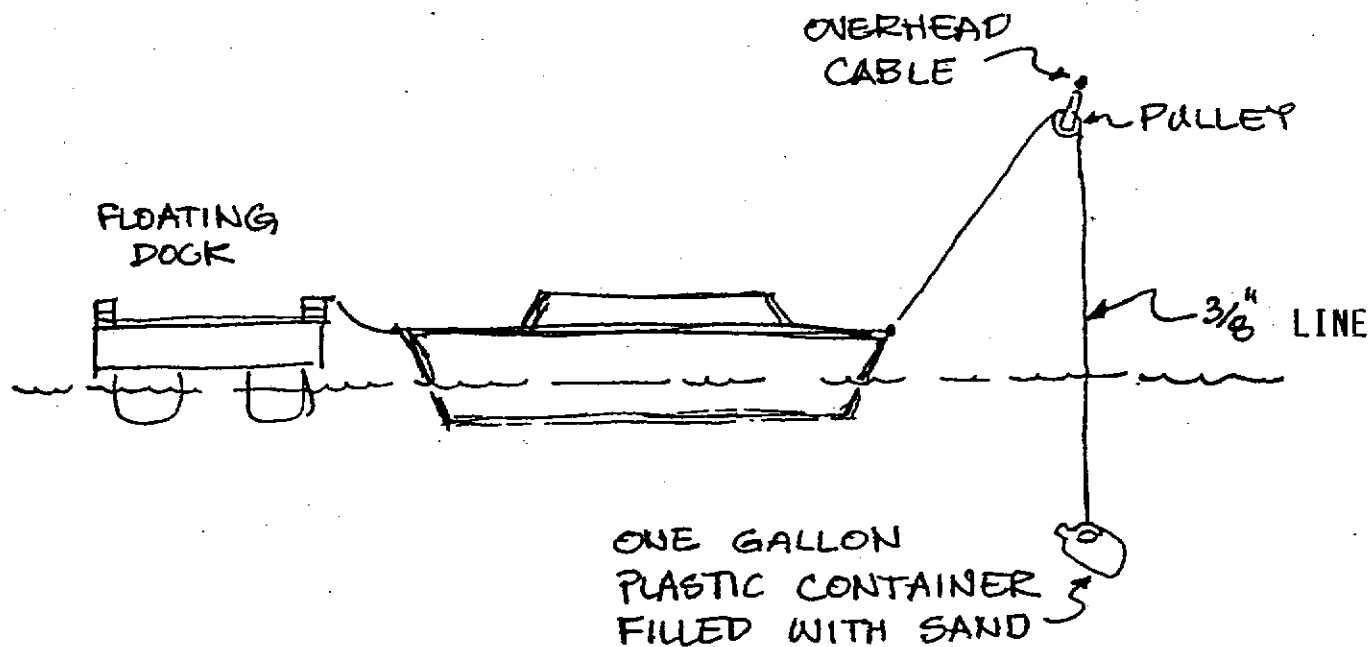

- * LINE MUST BE LONG ENOUGH TO PERMIT WEIGHT TO BE SUSPENDED BELOW THE WATER LINE AT ALL TIMES
- * PULLEYS ARE DESIGNED TO RECEIVE A 3/8" LINE
- * PULLEYS ARE POSITIONED ON THE CABLE TO PERMIT 2 PULLEYS FOR EACH DOCK SPACE
- * RECOMMENDED LINE:
3/8" TWISTED NYLON MOORING OR DOCK LINE